

Jacking castor with wheel



Jacking castor with wheel - BRJACKXH/PZ150

Technical Specification

Side winding jacking unit with wheel.


This special lifting castor construction can be fitted with wheels with nylon, rubber and polyurethane tyre.

Type

PZ = heavy duty polyamide (nylon) wheel

GZ = elastic rubber tyre and cast iron hub

PU = polyurethane tyre and cast iron hub

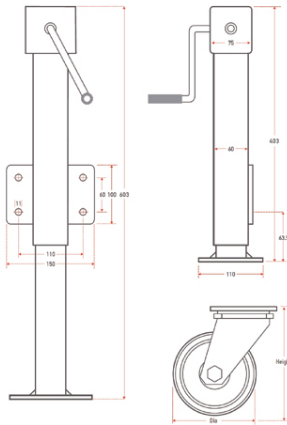

Specifications

| | |
|------------------------------|--------------------------|
| Article number | BRJACKXH/PZ150 |
| Article group | Specials |
| Category | Swivel and fixed castors |
| Load capacity 4 km/h | 850 |
| Tyre width | 48 |
| Max | 806 |
| Min | 606 |
| Type | PZ |
| Leading total braking device | FV |
| Wheel diameter | 150 |

Jacking castor with wheel

